

Transforming customer wishes into concrete solutions

Intro-
duction



Headquartered in Espelkamp in East Westphalia, Germany, the HARTING Technology Group develops tailored solutions and products revolving around electrical and electronic connector technologies. These offerings focus on power and data transmission applications, as well as on network solutions. Founded in 1945 in Minden, HARTING is currently employing a workforce of more than 3200 members of staff worldwide.

In today's increasingly knowledge and information shaped societies, the capability to network and integrate with customers and suppliers, as well as technology and business partners is playing the decisive role. And this applies to national as well as international levels. With 40 Subsidiary companies and Representatives in 27 countries, HARTING is committed to maintaining close proximity to markets and customers. Always at hand on location, HARTING is able to rapidly record market impulses and respond flexibly.



HARTING Subsidiary company



HARTING Representatives



WE ASPIRE TO TOP PERFORMANCE.

Connectors ensure functionality. As core elements of electrical and optical wiring, connection and infrastructure technologies, they are essential in enabling the modular construction of devices, machines and systems across a very wide range of industrial applications. Their reliability is a crucial factor guaranteeing smooth functioning in the manufacturing area, in telecommunications, applications in medical technology – in fact, connectors are at work in virtually every conceivable application area. Thanks to the consistent further development of our technologies, customers enjoy investment security and benefit from durable, long term functionality.

ALWAYS AT HAND, WHEREVER OUR CUSTOMERS MAY BE.

Increasing industrialization is creating growing markets characterized by widely diverging demands and requirements. The search for perfection, increasingly efficient processes and reliable technologies is a common factor in all sectors across the globe.

HARTING is providing these technologies – in Europe, America and Asia. The **HARTING** professionals at our international subsidiaries engage in close, partnership based interaction with our customers, right from the very early product development phases, in order to realize customer demands and requirements in the best possible manner.

Our people on location form the interface to the centrally coordinated development and production departments. In this way, our customers can rely on consistently high, superior product quality – worldwide.

OUR CLAIM: PUSHING PERFORMANCE.

HARTING provides more than optimally attuned components. In order to serve our customers with the best possible solutions, **HARTING** is able to contribute a great deal more and play a closely integrative role in the value creation process.

From ready assembled cables through to control racks or ready-to-go control desks: Our aim is to generate the maximum benefits for our customers – without compromise!

QUALITY CREATES RELIABILITY – AND WARRANTS TRUST.

The **HARTING** brand stands for superior quality and reliability – worldwide. The standards we set are the result of consistent, stringent quality management that is subject to regular certifications and audits.

EN ISO 9001, the EU Eco-Audit and ISO 14001:2004 are key elements here. We take a proactive stance to new requirements, which is why **HARTING** ranks among the first companies worldwide to have obtained the new IRIS quality certificate for rail vehicles.

HARTING TECHNOLOGY CREATES ADDED VALUE FOR CUSTOMERS.

Technologies by HARTING are at work worldwide. HARTING's presence stands for smoothly functioning systems, powered by intelligent connectors, smart infrastructure solutions and mature network systems. In the course of many years of close, trust-based cooperation with its customers, the HARTING Technology Group has advanced to one of the worldwide leading specialists for connector technology. Extending beyond the basic functionalities demanded, we offer individual customers specific and innovative solutions. These tailored solutions deliver sustained effects, provide investment security and enable customers to achieve strong added value.

OPTING FOR HARTING OPENS UP AN INNOVATIVE, COMPLEX WORLD OF CONCEPTS AND IDEAS.



In order to develop connectivity and network solutions serving an exceptionally wide range of connector applications and task scopes in a professional and cost optimized manner, HARTING not only

commands the full array of conventional tools and basic technologies. Over and beyond these capabilities, HARTING is constantly harnessing and refining its broad base of knowledge and experience to create new solutions that ensure continuity at the same time. In securing this know-how lead, HARTING draws on a wealth of sources from both in-house research and the world of applications alike.

Salient examples of these sources of innovative knowledge include microstructure technologies, 3D design and construction technology, as well as high temperature or ultrahigh frequency applications that are finding use in telecommunications or automation networks, in the automotive industry, or in industrial sensor and actuator applications, RFID and wireless technologies, in addition to packaging and housing made of plastics, aluminum or stainless steel.

HARTING SOLUTIONS EXTEND ACROSS TECHNOLOGY BOUNDARIES.

Drawing on the comprehensive resources of the group's technology pool, HARTING devises

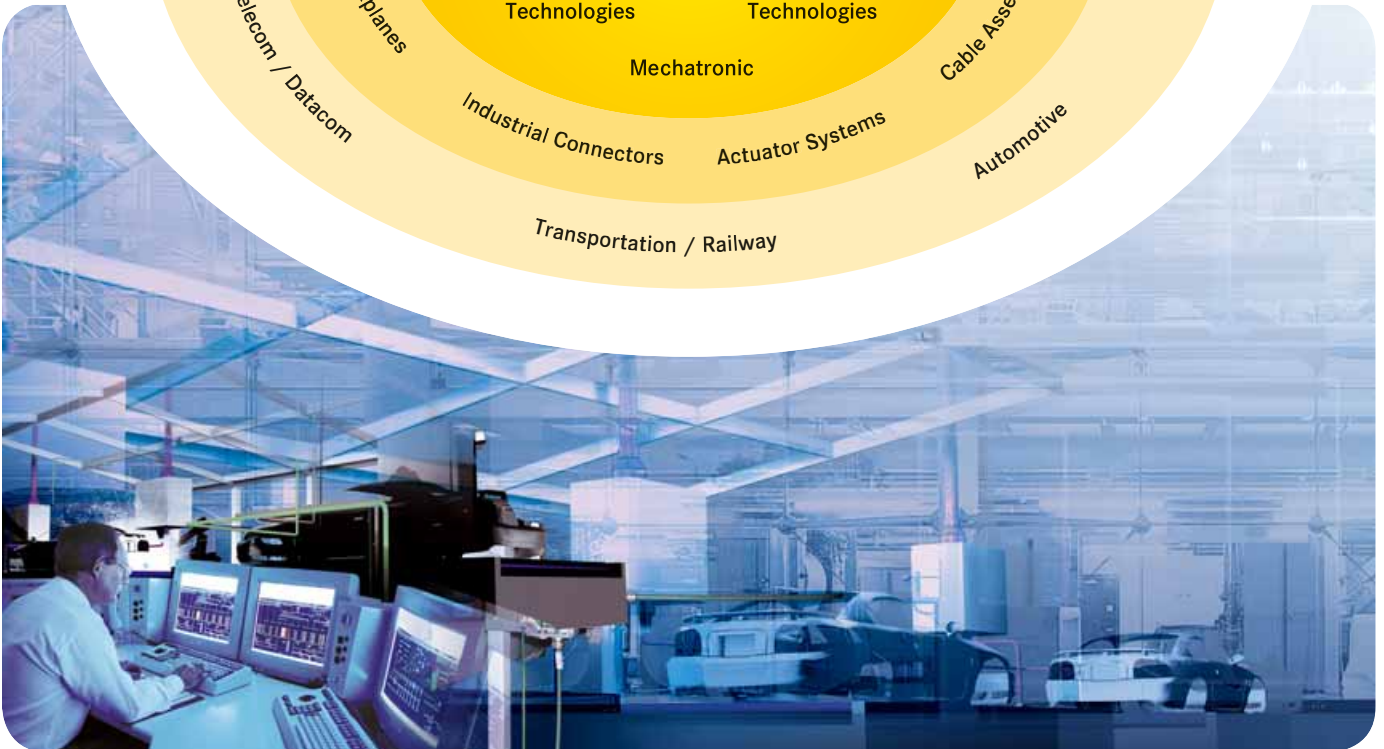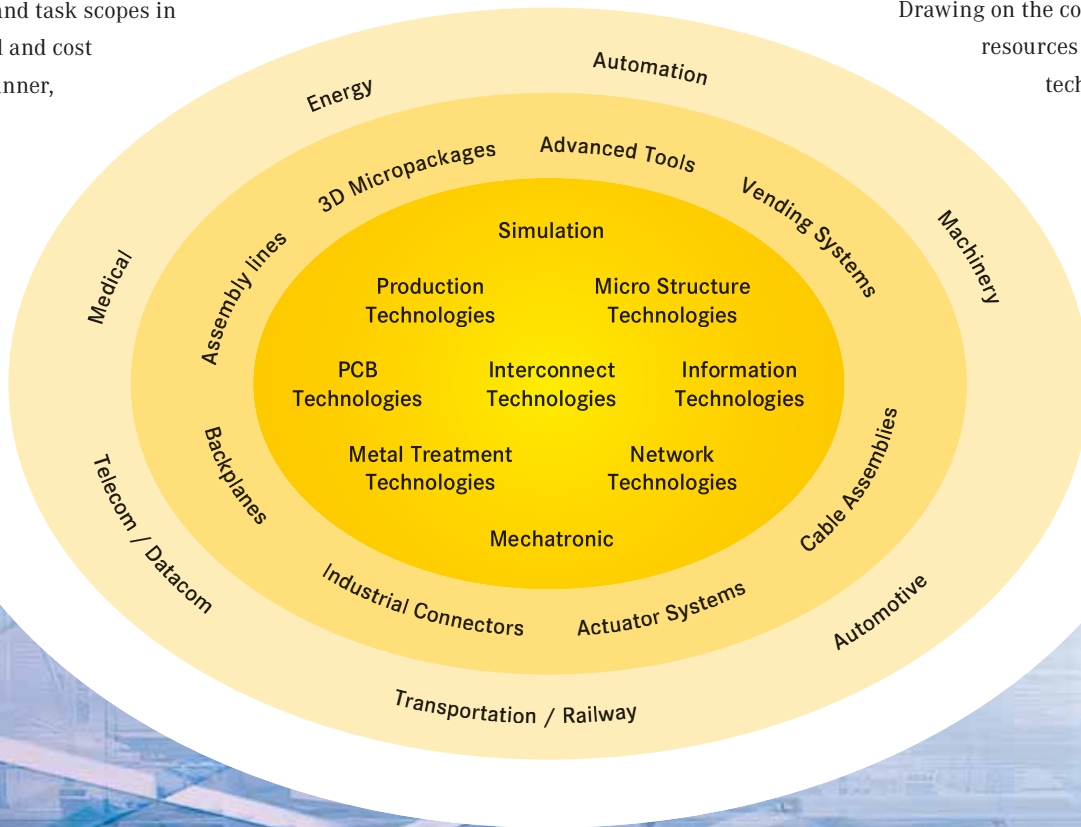

Introduction

practical solutions for its customers. Whether this involves industrial networks for manufacturing automation, or hybrid interface solutions for wireless telecommunication infrastructures, 3D circuit carriers with microstructures, or cable assemblies for high-temperature applications in the automotive industry - **HARTING** technologies offer far more than components, and represent mature, comprehensive solutions attuned to individual customer requirements and wishes. The range covers ready-to-use cable configurations, completely assembled backplanes and board system carriers, as well as fully wired and tested control panels.

In order to ensure the future proof design of RF- and EMC-compatible interface solutions, the central **HARTING** laboratory (certified to EN 45001) provides simulation tools, as well as experimental, testing and diagnostics facilities all the way through to scanning electron microscopes. In the selection of materials and processes, lifecycle and environmental aspects play a key role, in addition to product and process capability considerations.

HARTING KNOWLEDGE IS PRACTICAL KNOW-HOW GENERATING SYNERGY EFFECTS.

HARTING commands decades of experience with regard to the applications conditions of connectors in telecommunications, computer and network technologies and medical technologies, as well as industrial automation technologies, such as the mechanical engineering and plant engineering areas, in addition to the power generation industry or the transportation sector. **HARTING** is highly conversant with the specific application areas in all of these technology fields.

The key focus is on applications in every solution approach. In this context, uncompromising, superior quality is our hallmark. Every new solution found will invariably flow back into the **HARTING** technology pool, thereby enriching our resources. And every new solution we go on to create will draw on this wealth of resources in order to optimize each and every individual solution. In this way, **HARTING** is synergy in action.



Economic and Reliable Connections

Specifications

DIN EN 60664-1 (VDE 0110-1)

Principles,
requirements and tests

DIN EN 61984 (VDE 0627)

Connectors,
Safety requirements and tests

Note:

The connectors included in this catalogue should not be coupled or decoupled under electrical load unless otherwise stated.

The provision of protection against electric shock is the responsibility of the user. Protection can be achieved by the use of HARTING hoods and housings coupled with/or alternatively appropriate installation methods provided by the user.

The female connector in a HARTING hood or housing offers finger safe protection according to relevant standards for the mating face, even in the unmated condition, unless otherwise stated.

Connectors of the same or different series being mounted side by side may be protected against incorrect mating by the use of coding options.

Standard

DIN EN 175301-801

Approvals

UL File No. E 235076 (www.ul.com)

CSA File No. LR 18753, SEV
for inserts



Certified according to EN ISO 9001
in design/development, production,
installation and servicing

Terminations

- Screw terminal
- Crimp terminal
- Cage-clamp terminal
- Wrap terminal
- Solder terminal
- Axial-screw terminal
- Rapid terminal
- IDC termination

Inserts

- Leading protective ground
- Polarised for correct mating
- Interchangeability of male and female inserts in hoods and housings
- Captive fixing screws
- Can be used with hoods and housings, or for rack and panel applications

Hoods/Housings

- Standard Hoods/Housings
- Hoods/Housings for harsh environmental requirements
- Hoods/Housings for intrinsically safe plant
- Degree of protection IP 65
- Electrical connection with protective ground
- High mechanical strength and vibration-resistance ensured by locking levers
- Spring-loaded covers in shockproof thermoplastic or metal covers, both lockable

Accessories

- Extensive range of cable protection and sealing accessories
- Protective covers available
- Coding options for incorrect mating protection

For "non standard applications" we can manufacture designs to match your requirements.
Please discuss requirements with us.

HARTING components help you to construct top quality products – economically and in line with market requirements.

General information


It is the customer's responsibility to check whether the components illustrated in this catalogue comply with different regulations from those stated in special fields of application which we are unable to foresee.

We reserve the right to modify designs in order to improve quality, keep pace with technological advancement or meet particular requirements in production.

No part of this catalogue may be reproduced in any form (print, photocopy, microfilm or any other process) or processed, duplicated or distributed by means of electronic systems without the written permission of HARTING Electric GmbH & Co. KG, Espelkamp. We are bound by the German version only.

Contents		Chapter	
Industrial Connectors Han®	Technical Characteristics	00	Han
Slim Construction Size (up to 16 amperes)	Han A®	01	Han A
High pin count connectors up to 216 contacts	Han D® / DD®	02	Han D / DD
Connectors for 16 amperes – proven and reliable	Han E® / Han® ES/ESS/EE	03	Han E / EE
Connectors for higher voltages	Han Hv E® / Han® Hv ES	04	Han HvE
Combination Connectors	Han-Com®	05	Han Com
Modular Connectors	Han-Modular®	06	Han Modular
Connectors for higher currents	Han® HsB	07	Han HsB
Terminal Block Connectors	Han® AV	08	Han AV
Connectors for low voltages	Staf®	09	Staf
Circular Connectors	R 15	10	R 15
Connectors for the use in switch cabinets	Han-Snap®	11	Han Snap
Interface for power and signals	Han-Port®	12	Han-Port
Connectors (not only for drives)	Han® Q	13	Han Q
High Current Connectors	Han® K 3/0, K 3/2 / Han® HC-Modular	14	Han HC-Modular
Energy Bus Components	Power Distribution	15	Power Distribution
Industrial Bus Interface	Han-Brid®	19	Han-Brid
Han® PCB-Adapter		20	PCB-Adapter
Han® Hoods and Housings with Pg entries	for shielding, for harsh environments with various locking systems	30	Han Hoods Housings
Han® Hoods and Housings with metric thread	for shielding, for harsh environments with various locking systems	31	Han Hoods Housings
Accessories for Hoods and Housings / Han® Inserts		40	Accessories
Han® Thermocouple		41	Thermocouple
HARAX®		50	HARAX
Tools		99	Tools
Application Overview			Applications
List of Part-Numbers			Part No.

Han

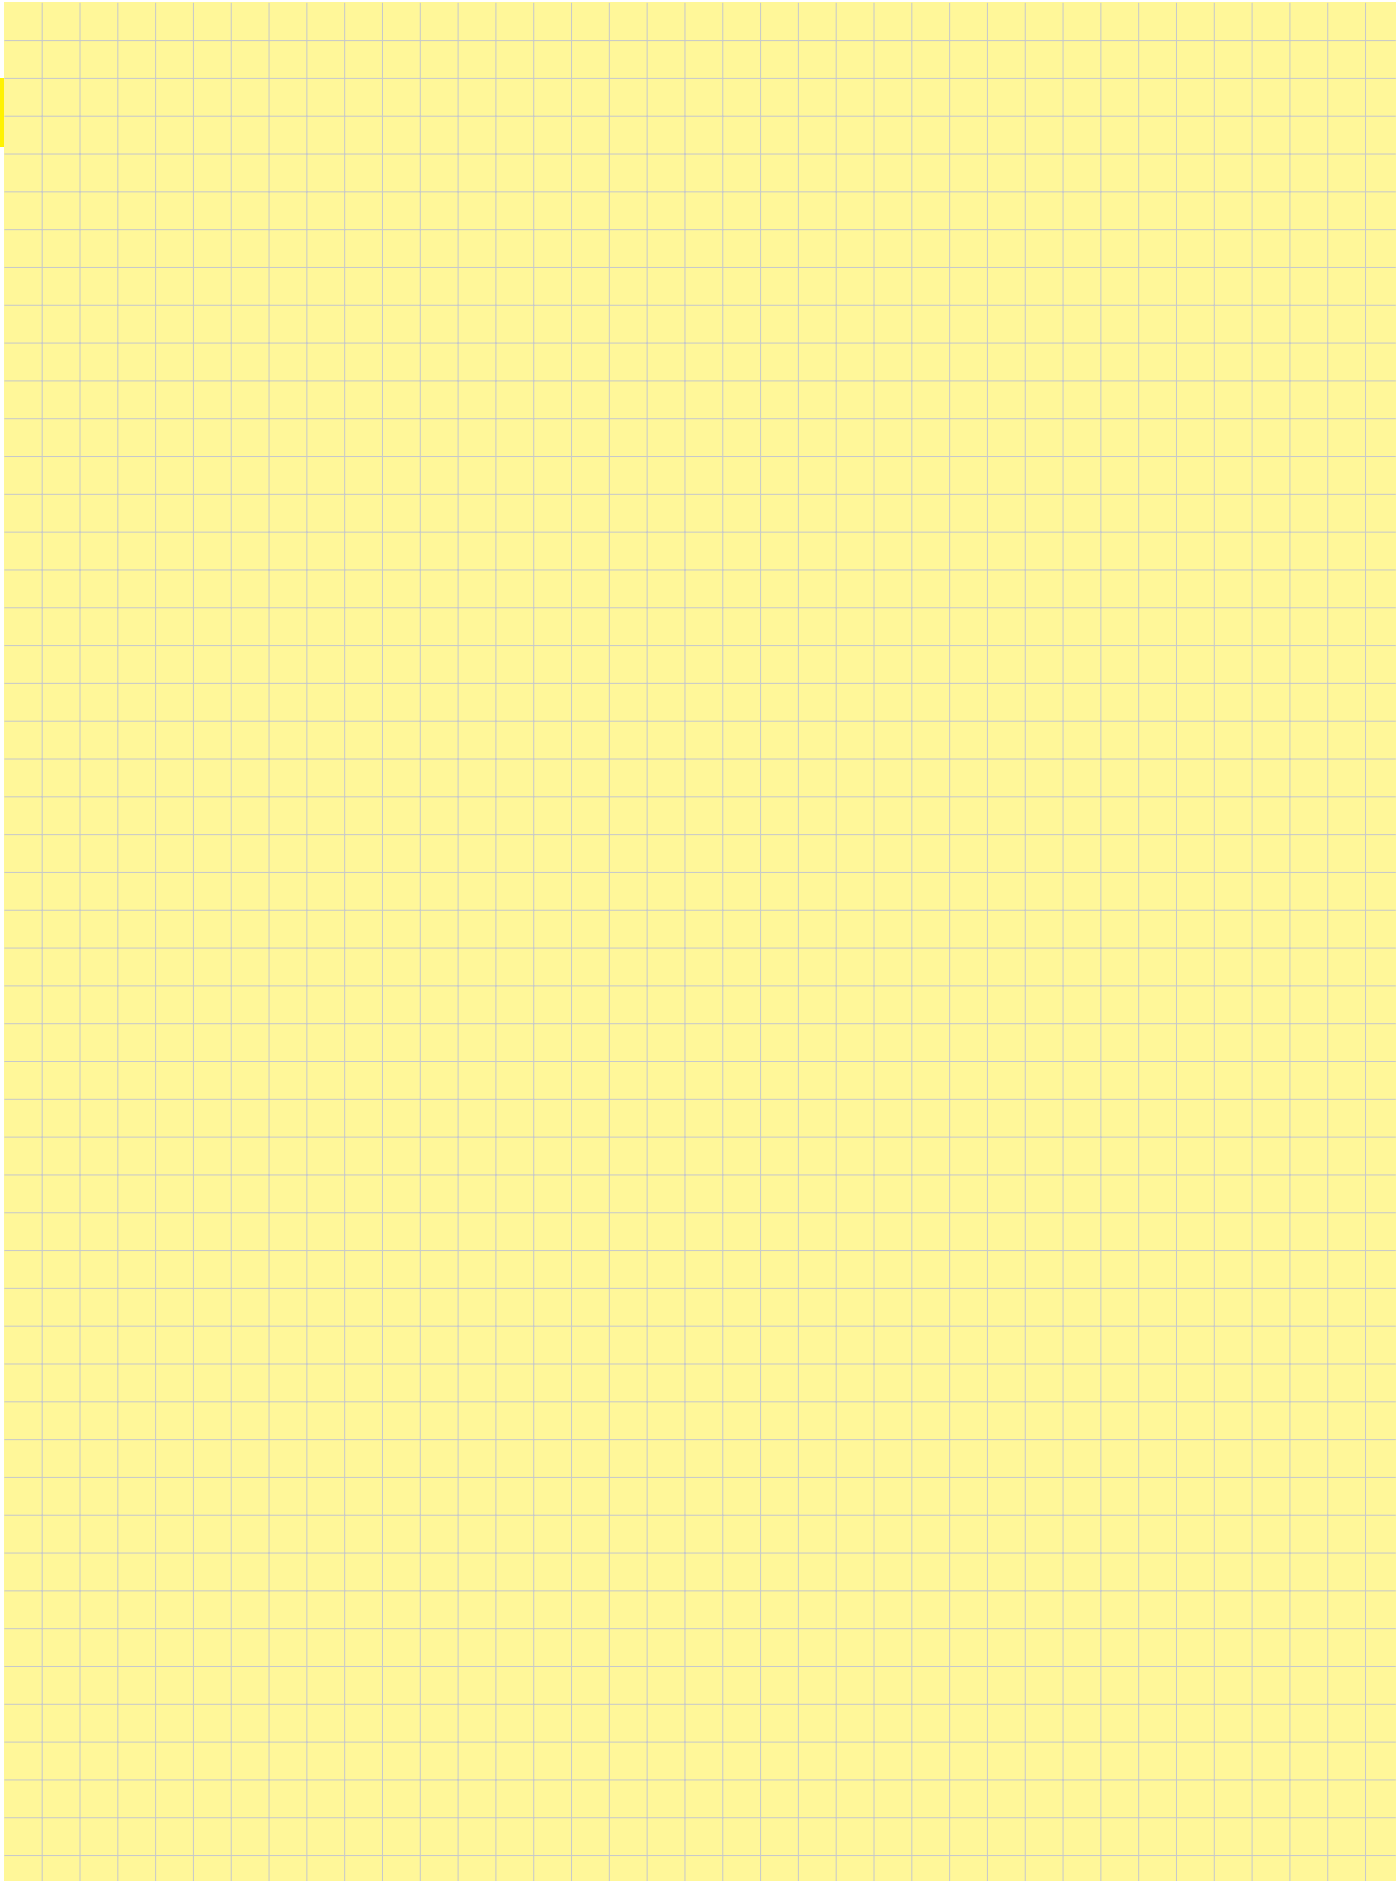


Contents


	Page
HARKIS® – part configuration/CAD library	00.05
Summary Han® – Sizes A	00.06
Summary Han® – Sizes B	00.07
How to order connectors	00.08
Hoods/housings connector insert protection	00.09
Summary hoods/housings	00.10
Hoods/Housings variants	00.11
Summary locking systems	00.12
Terminations technology	00.13
Electrical engineering data	00.21
Current carrying capacity	00.24
Cross Reference from Pg thread to metric cable thread	00.26
Declaration of Conformity	00.27

Visit our homepage:

www.HARTING.com

Han

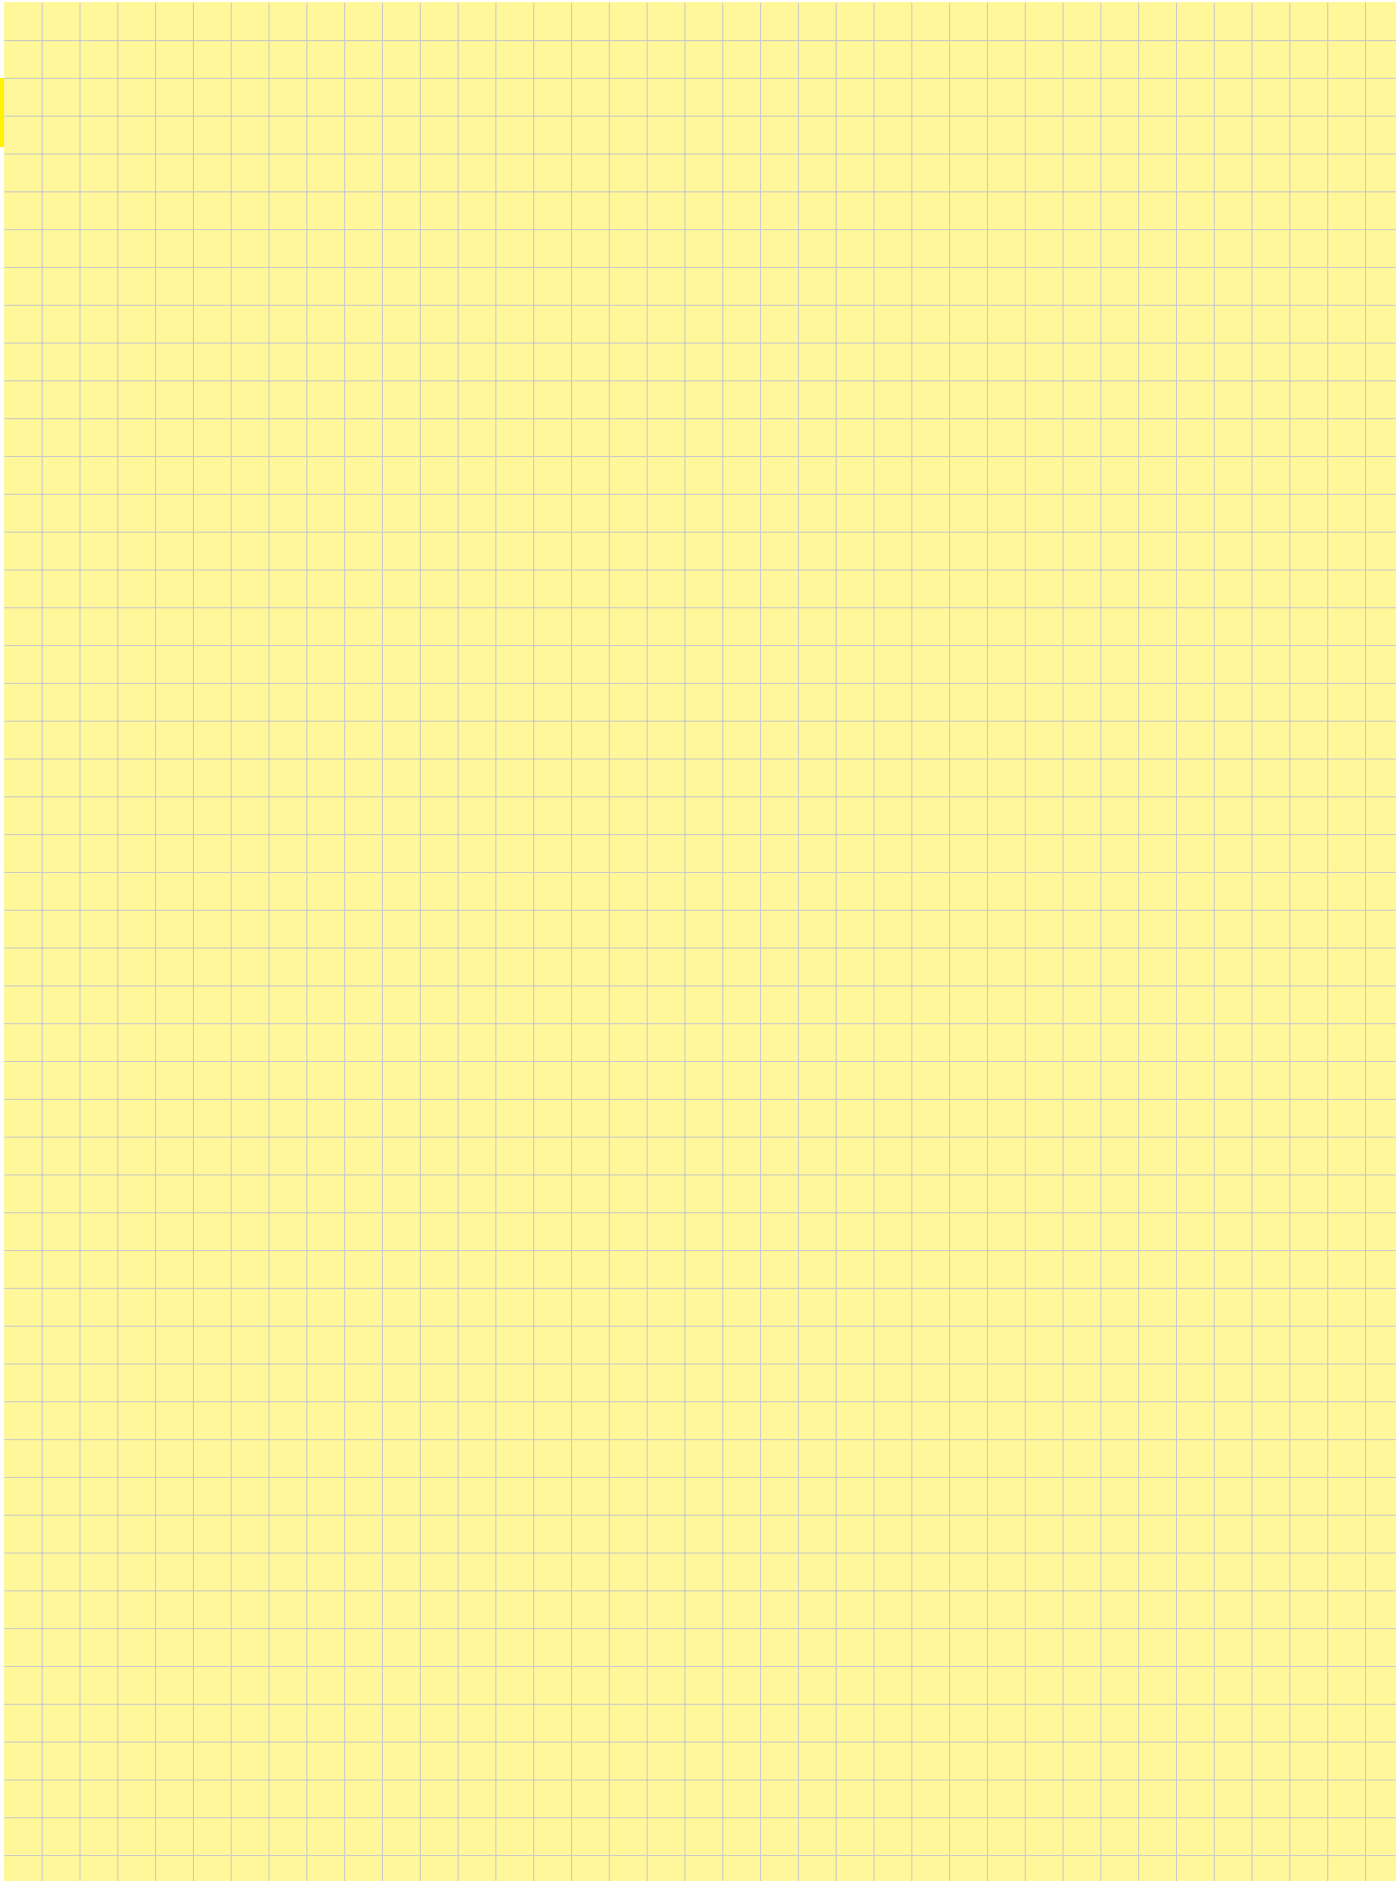


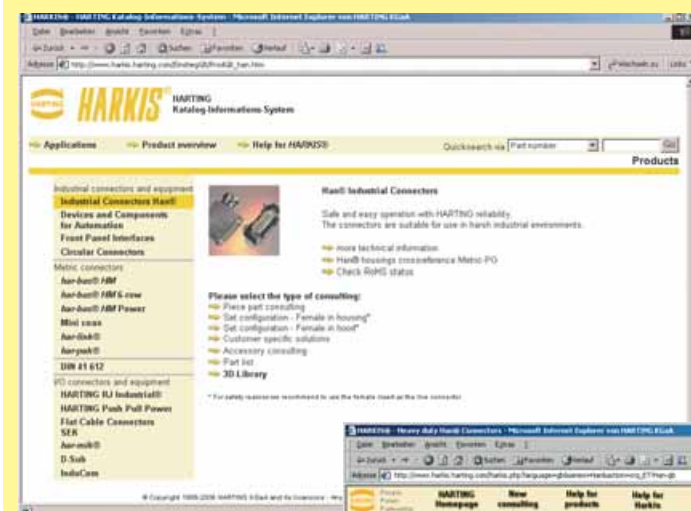


HARKIS® is the abbreviation for **HARTING-Katalog-Informationen-System** (HARTING catalogue information system).

HARKIS® is an electronic catalogue with part configuration and 3D components library. Here you can configure a connector part by part according to your demands. Afterwards you are able to send your inquiry created with the listed parts. The drawings to every single part are available in PDF-format. The parts are downloadable in 2D-format (DXF) and 3D-format (IGES, STEP). The 3D-models can be viewed with a VRML-viewer.

You can find **HARKIS®** our homepage www.HARTING.com. It is also available on CD-Rom and DVD.

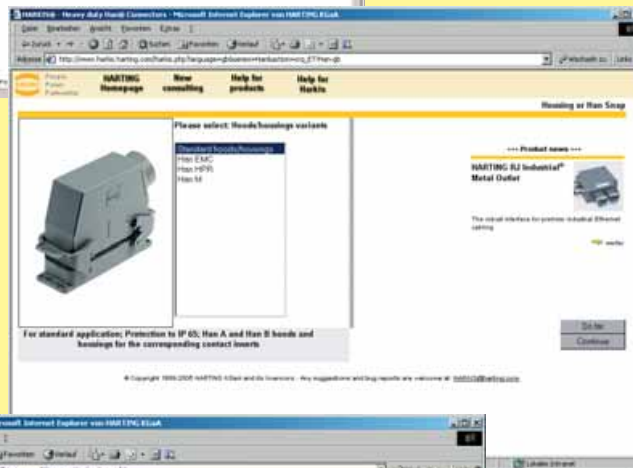

Part configuration

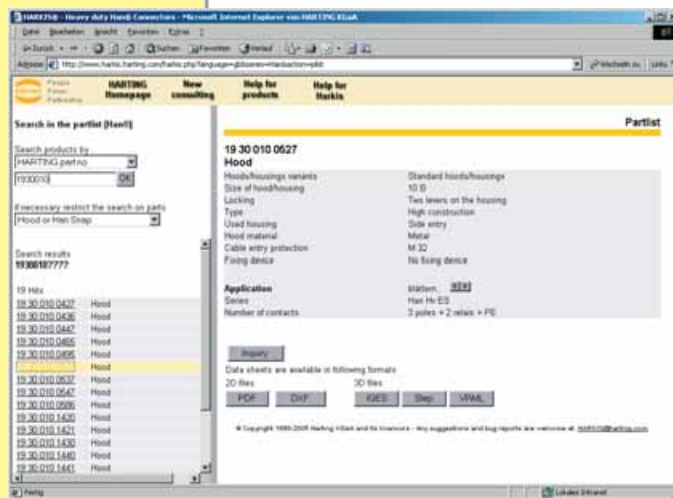

CAD library

Identification

Part number

HARKIS® CD-Rom
Basic product catalogue

98 40 000 0401

HARKIS® DVD
Basic product catalogue
2D and 3D CAD files inclusive

98 40 000 0405



Size Description





Han

A


3

Hood side-entry

Hood top-entry

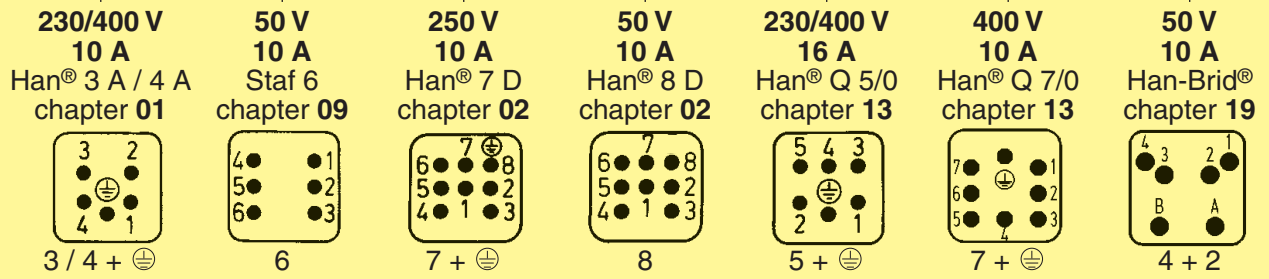

Hood top-entry




Hood side-entry




10


250 V
16 A
Han A®
chapter 01




250 V
10 A
Han D®
chapter 02






50 V
10 A
Staf®
chapter 09



50 V – 1000 V
5 A – 70 A
Han-Modular®
chapter 06



16



Housing bulkhead mounting



Housing surface mounting




Hood cable to cable coupling




suitable for 2 inserts of size 16 A

Size Description

B




Hood side-entry



Hood top-entry

250 V 10 A Han D® chapter 02	250 V 10 A Han DD® chapter 02	500 V 16 A Han E® Han® ES chapter 03	500 V 16 A Han® EE chapter 03	400/690 V 35 A Han® HsB chapter 07	830 V 16 A Han Hv E® Han® Hv ES chapter 04	160 V – 690 V 10 A – 100 A Han-Com® chapter 05	50 V – 5000 V 5 A – 200 A Han-Modular® chapter 06
--	---	--	---	--	--	--	---


6




24 + ⊕



6 + ⊕




10 + ⊕




2 modules


10




42 + ⊕




10 + ⊕




18 + ⊕



3 + ⊕




4/4 + ⊕
8/24 + ⊕




3 modules


16




40 + ⊕




72 + ⊕




16 + ⊕




32 + ⊕




6 + ⊕



6 + ⊕




6/36 + ⊕
4/2 + ⊕




4 modules


24




64 + ⊕




108 + ⊕




24 + ⊕




46 + ⊕



16 + ⊕
10 + ⊕




4/8 + ⊕
6/6 + ⊕



6 modules


Housing surface mounting



Housing bulkhead mounting



Hood cable to cable coupling



32

suitable for 2 inserts of size 16 B

48

suitable for 2 inserts of size 24 B

Han

00

07

For a complete connector components may be ordered from the following sub headings

Han

Cable entry protection

- Universal cable glands
- Special cable clamp with strain relief, bell mouthed cable fitting and anti-twist devices
- Cable gland with normal or multiple seal
- Extensive range of accessories

Hoods

- low or high construction
- top or side cable entry
- 1 or 2 locking levers

Male insert with

- screw terminal or crimp terminal (order contacts separately) or cage-clamp terminal

Female insert with

- screw terminal or crimp terminal (order contacts separately) or cage-clamp terminal


Housings

- Housing (bulkhead mounting) with or without thermoplastic or metal covers
- 1 or 2 locking levers
- Housing (surface mounting) low or high construction with or without thermoplastic or metal covers
- 1 or 2 locking levers
- 1 or 2 cable entries
- Hood (cable to cable) low or high construction for cable to cable connections


Accessories

- Protective covers available
- Code and guide pins for coding
- Special insert fixing screws for use without hoods and housings
- Label according to CSA-approval

Suitable hoods and housings will be found on the same page.




Cable clamp




Hood



Male contacts




Male insert



Female insert




Female contacts

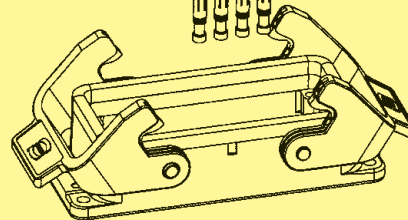

Housing

Part number explanation

Our computerized ordering system uses the following code:

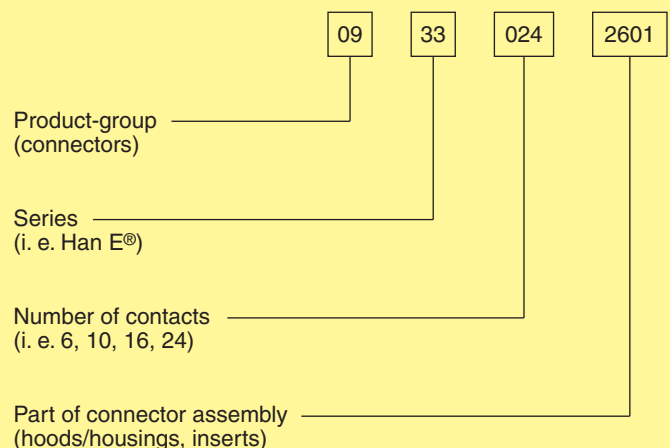

The connector's housing, sealing and locking mechanism protect the connection from external influences such as mechanical shocks, foreign bodies, humidity, dust, water or other fluids such as cleansing and cooling agents, oils, etc. The degree of protection the housing offers is explained in the IEC 60 529, DIN EN 60 529, standards that categorize enclosures according to foreign body and water protection.

The following table shows the different degrees of protection.

Code letters (International Protection)				First Index Figure (Foreign bodies protection)		Second Index Figure (Water protection)	
IP				6		5	
Index figure	Degree of protection			Index figure	Degree of protection		
0	No protection		No protection against accidental contact, no protection against solid foreign bodies	0	No protection against water		No protection against water
1	Protection against large foreign bodies		Protection against contact with any large area by hand and against large solid foreign bodies with $\varnothing > 50$ mm	1	Drip-proof		Protection against vertical water drips
2	Protection against medium sized foreign bodies		Protection against contact with the fingers, protection against solid foreign bodies with $\varnothing > 12$ mm	2	Drip-proof		Protection against water drips (up to a 15° angle)
3	Protection against small solid foreign bodies		Protection against tools, wires or similar objects with $\varnothing > 2.5$ mm, protection against small foreign solid bodies with $\varnothing > 2.5$ mm	3	Spray-proof		Protection against diagonal water drips (up to a 60° angle)
4	Protection against grain-shaped foreign bodies		As 3 however $\varnothing > 1$ mm	4	Splash-proof		Protection against splashed water from all directions
5	Protection against injurious deposits of dust		Full protection against contact. Protection against interior injurious dust deposits	5	Hose-proof		Protection against water (out of a nozzle) from all directions
6	Protection against ingress of dust		Total protection against contact. Protection against penetration of dust	6	Strong hose-proof		Protection against strong water (out of a nozzle) from all directions
				7	Protected against immersion		Protected against temporary immersion
				8	Water-tight		Protected against water pressure


Standard Hoods/Housings

Field of application	for excellent mechanical and electrical protection in demanding environments, for example, in the automobile and mechanical engineering industries also for process and regulation control applications
Distinguishing feature	hoods/housings colour-coded grey (RAL 7037)
Material of hoods/housings	Die cast light alloy
Locking levers	Han-Easy Lock®
Cable entry protection	Optional special cable clamp for hoods with strain relief, bell mouthed cable fitting and anti-twist devices



Han® M Hoods/Housings for harsh environmental requirements

Field of application	for all applications where aggressive environmental conditions and extreme climatic atmospheres are encountered
Distinguishing feature	hoods/housings colour-coded black (RAL 9005)
Material of hoods/housings	Die cast light alloy, corrosion resistant
Locking levers	Corrosion resistant stainless steel
Cable entry protection	Special cable clamp for hoods with strain relief, bell mouthed cable fitting and anti-twist devices



Han® EMC Hoods/Housings with high shielding efficiency

Field of application	For sensitive interconnections that have to be shielded against electrical, magnetic or electro-magnetic interferences
Distinguishing feature	Electrically conductive surface, internal seal
Material of hoods/housings	Die cast light alloy
Locking levers	Han-Easy Lock®
Cable entry protection	EMC cable clamp in order to connect the cable shielding to the hood without interruption of the shielding



Han® HPR Hoods/Housings, pressure tight

Field of application	For external electrical interconnections in vehicles, in highly demanding environments and wet areas, as well as for sensitive interconnections that have to be shielded
Distinguishing feature	hoods/housings colour-coded black, internal seal (RAL 9005)
Locking parts	Stainless steel
Material of hoods/housings	Die cast light alloy, corrosion resistant
Cable entry protection	Optional universal cable clamp for hoods with strain relief, or special cable clamp with bell mouthed cable fitting and anti-twist devices (use of adapter is necessary)



Han-INOX® Hoods/Housings

Field of application for excellent mechanical and electrical protection in demanding environments, for example, in the food, automobile and mechanical engineering industries also for process and regulation control applications

Distinguishing feature matt-finished metal surface

Material of hoods/housings Stainless steel

Locking levers Stainless steel



Han

Recommended tightening torque for housings, bulkhead mounting

Series	Number of screws	Size of screws	Recommended Tightening torque (Nm)	Remarks
Han® 3 A	2	M 3	0.8 - 1.0	Gasket
Han® 10 A / 16 A	4	M 3	0.8 - 1.0	Gasket
Han® 15 EMV / 25 EMV	4	M 3	min. 1.0	O-ring
Han® 32 A	4	M 4	0.8 - 1.0	Gasket
Han® 6 B / 10 B / 16 B / 24 B	4	M 4	0.8 - 1.0	Gasket
Han® 32 B	4	M 5	min. 2.5	O-ring
Han® 48 B	4	M 6	min. 3.0	O-ring
Han® HPR 3	2	M 4	min. 1.0	O-ring
Han® HPR 6 / 10 / 16 / 24	2	M 6	min. 3.0	O-ring
Han® 48 HPR	4	M 8	min. 5.0	O-ring

To offer safe protection the surface condition for mounting panel should be according to DIN 4766:

- Waviness ≤ 0.2 mm on 200 mm distance
- Roughness $R_a \leq 16$ μm

Housing with 2 levers Han-Easy Lock®

- easy operation
- high degree of pressure tightness
- reliable locking guaranteed by 4 locking points
- space saving mounting
- ideal for mounting side by side
- cable to cable connection is possible
- high seal force

Details of Han-Easy Lock® see chapter 30 and chapter 31



Housing with 1 lever Han-Easy Lock®

- easily accessible, even with side entry
- possibility to lock protective covers on the housing
- cable to cable connection is possible
- 2 locking points on the longitudinal axis



1 lever in central position

- easily accessible, even with side entry
- 2 locking points on the lateral axis
- space saving mounting
- ideal for mounting side by side
- single hand operation



Screw locking / toggle locking

- hexagon nuts tightened with spanner
- highest degree of pressure tightness
- easily accessible, also with side entry
- use of tools avoids access by unauthorized persons




Hood with 2 levers Han-Easy Lock®

- easy operation
- high degree of pressure tightness
- ideal for mating to housings with protection cover
- high seal force



Screw terminal

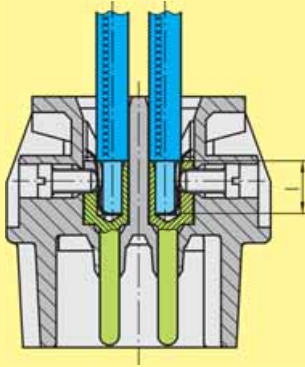

Screw terminals meet VDE 0609 /EN 60 999. Dimensions and tightening torques for testing are shown in following table.


Screw dimensions and tightening torque for screw terminals

Wire gauge (mm ²)	1.5	2.5	4	6	10	16
Screw thread	M3	M3	M3.5	M4	M4	M6
Test moment of torque (Nm)	0.5	0.5	0.8	1.2	1.2	1.2*
min. pull-out for stranded wire (N)	40	50	60	80	90	100

* for screws without heads


The relevant regulations state that in the case of

- Terminals with wire protection



the use of ferrules is not necessary. Series Han E®, Han® HsB, Han Hv E®, Han® K 6/12, Han® K 6/6

- Terminals without wire protection



The insulation is first stripped and then a wire ferrule must be used.

Series Han® K 4/x, Han A®, Staf®


Inserts	max. wire gauge		Stripping length
	(mm ²)	AWG	l (mm)
Han® 3 A, Han® 4 A	2.5	14	4.5
Han E®, Han® K, Han A®, Han Hv E®	2.5	14	7.5
Han® HsB	6.0	10	11.5
Staf®	1.5	16	4.5
Han® K 4/x (80 A)	16.5	6	14.0

Recommended tightening torque and size of screw driver


Screw size	Connector type	Ø Tightening torque* (Nm)	Ø Tightening torque (lbft)	Recommended size of screw driver
M 3	Screw terminal Han® 3 A /4 A /Q 5/0	0.25	0.20	0.4 x 2.5
M 3	Screw terminal Han®10 A –32 A	0.50	0.40	0.5 x 3.5 or ± size 1
M 3	Screw terminal Han E®, Hv E® fixing screws of all kinds, guiding pins and bushes	0.50	0.40	0.5 x 3.5 or ± size 1 + 2
M 4	Ground terminal Han A®, Han E®, Han D®, DD®, Ground terminal K(8/24)	1.20	0.90	0.5 x 3.5 or ± size 1 + 2
M 4	Screw terminal Han®HsB	1.20	0.90	0.8 x 4.5
M 5	Ground terminal Han® HsB, Han® HsC (K 12/2), K4/x, K 6/12	2.00	1.40	0.8 x 4.5 1.2 x 8
M 6	Screw terminal Han® K 4/x (80 A)	see chapter 05		0.8 x 4.5

Increasing the tightening torque does not improve considerably the contact resistances. The torque moments were determined when optimum mechanical, thermal and electrical circumstances were given. If the recommended figures are considerably exceeded the wire or the termination can be damaged.

Crimp connection

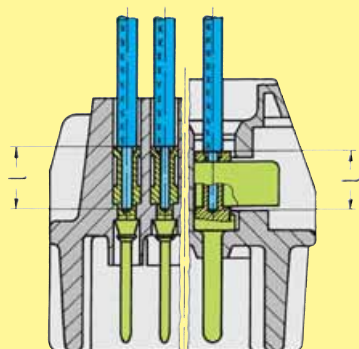

Han DD®
 Han D®
 R 15
 Han-Modular® (10 A)
 Han E®
 Han A®
 Han Hv E®



Han-Com® (40 A)
 Han-Modular® (40 A)
 Han E®
 Han A®
 Han Hv E®
 Han® EE
 Han-Modular® (16 A)

A perfect crimp connection is gastight, therefore corrosion free and amounts to a cold weld of the parts being connected. For this reason, major features in achieving high quality crimp connections are the design of the contact crimping parts and of course the crimping tool itself. Wires to be connected must be carefully matched with the correct size of crimp contacts. If these basic requirements are met, users will be assured of highly reliable connections with low contact resistance and high resistance to corrosive attack.

The economic and technical advantages are:

- Constant contact resistance as a result of precisely repeated crimp connection quality
- Corrosion free connections as a result of cold weld action
- Pre-preparation of cable forms with crimp contacts fitted
- Optimum cost cable connection

Requirements for crimp connectors are laid down in DIN EN 60 352-2 as illustrated in the table.

Pull out force of stranded wire

The main criterion by which to judge the quality of a crimp connection is the retention force achieved by the wire conductor in the terminal section of the contact. DIN EN 60 352-2 defines the extraction force in relation to the cross-section of the conductor. When fitted using HARTING crimping tools and subject to their utilization in an approved manner, our crimp connectors comply with the required extraction forces.

Crimping tools

Crimping tools (hand operated or automatic) are carefully designed to produce with high pressure forming parts a symmetrical connection of the crimping part of the contact and the wire being connected with the minimum increase in size at the connection point. The positioner automatically locates the crimp and wire at the correct point in the tool.

A ratchet in the tool performs 2 functions:

- It prevents insertion of the crimp into the tool for crimping before the jaws are fully open
- It prevents the tool being opened before the crimping action is completed

Identical, perfectly formed, connections can be produced using this crimping system.

Crimp-cross section



HARTING-crimp profile



BUCHANAN crimp profile

Tensile strength of crimped connections
 (Table 1 of the DIN EN 60 352-2)


Conductor cross-section		Tensile strength
mm ²	AWG	N
0.05	30	6
0.08	28	11
0.12	26	15
0.14		18
0.22	24	28
0.25		32
0.32	22	40
0.5	20	60
0.75		85
0.82	18	90
1.0		108
1.3	16	135
1.5		150
2.1	14	200
2.5		230
3.3	12	275
4.0		310
5.3	10	355
6.0		360
8.4	8	370
10.0		380

Wire gauge		Internal diameter Ø (mm)	Stripping length l (mm)		
(mm ²)	AWG		Han® DD Han® D R15 Han-Modular® (10 A)	Han E® Han A® Han Hv E®	Han® C
0.14 - 0.37	26 - 22	0.9	8	-	-
0.5	20	1.15	8	7.5	-
0.75	18	1.3	8	7.5	-
1	18	1.45	8	7.5	-
1.5	16	1.75	8	7.5	9
2.5	14	2.25	6	7.5	9
4	12	2.85	-	7.5	9.6
6	10	3.5	-	-	9.6

	Conductor cross-section	Ø	Stripping length
Han® 100 A Modul	16 mm ²	5,5 mm	19,0 mm
	25 mm ²	7,0 mm	19,0 mm
	35 mm ²	8,2 mm	16,0 mm
Han® HC Modular 350	35 mm ²	8,2 mm	26,0 mm
	50 mm ²	10,0 mm	28,0 mm
	70 mm ²	11,5 mm	28,0 mm
	95 mm ²	13,5 mm	30,0 mm
Han® HC Modular 650	120 mm ²	15,5 mm	24,0 mm
	240 mm ²	22,5 mm	50,0 mm

for fine stranded wires according to IEC 60 228 class 5

Axial screw terminal

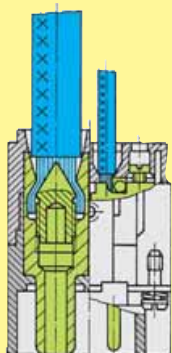

This termination combines the benefits of screw and crimp terminations:

- Less space required
- Easy handling
- No special tools

Remarks on the axial screw technique

The wire gauges mentioned in the catalogue refer to geometric wire gauges of cables.

Background:

According to DIN VDE 0295 for cables and insulated wires the wire gauge will be determined by conductance (Ω/km) and maximum wire diameter. A minimum cable diameter is not specified! (Example: nominal wire gauge $95 \text{ mm}^2 \rightarrow$ real, geometric wire gauge 89 mm^2)

Recommendation:

The use of cables with an extreme geometric wire gauge deviation should be checked separately with the use of the axial screw termination.

Strain relief:

For safe operation the cable must be fixed at an adequate distance from the terminal to ensure that the contact is protected against radial stress.

Details for professional strain relief design can be found in the standard DIN VDE 0100-520: 2003-06 (see enclosed table).

Outer cable diameter (mm)	Maximum fixing distance (mm)	
	horizontal	vertical
$D \leq 9$	250	400
$9 < D < 15$	300	400
$15 < D < 20$	350	450
$20 < D < 40$	400	550

Cables:

The axial screw technology is developed for wires according to VDE 0295 class 5 (see table: Wire assembly according to VDE 0295). Deviating cable assemblies have to be tested separately.

Assembly remarks:

Before starting the assembly the user must ensure that the axial cone is screwed fully downward to completely open the contact chamber.

After stripping the cable insulation the strands must not be twisted and the maximum cable insulation must not exceed the recommended dimension.

Insert the wire completely into the contact chamber until the copper strands reach the bottom. Keep the cable in position while applying the recommended tightening torque.

Maintenance of the axial screw termination:

After initial assembly it is only allowed to reapply the recommended tightening torque once in order to avoid damage to individual cable strands.

Wire assembly according to DIN EN 60228

Wire gauge (mm ²)	Stranded wires DIN EN 60228 class 2	Fine stranded wires DIN EN 60228 class 5	Super fine stranded wires DIN EN 60228 class 6			
			28 x 0.15	64 x 0.10	131 x 0.07	256 x 0.05
0.5	7 x 0.30	16 x 0.20				
0.75	7 x 0.37	24 x 0.20	42 x 0.15	96 x 0.10	195 x 0.07	384 x 0.05
1	7 x 0.43	32 x 0.20	56 x 0.15	128 x 0.10	260 x 0.07	512 x 0.05
1.5	7 x 0.52	30 x 0.25	84 x 0.15	192 x 0.10	392 x 0.07	768 x 0.05
2.5	7 x 0.67	50 x 0.25	140 x 0.15	320 x 0.10	651 x 0.07	1280 x 0.05
4	7 x 0.85	56 x 0.30	224 x 0.15	512 x 0.10	1040 x 0.07	
6	7 x 1.05	84 x 0.30	192 x 0.20	768 x 0.10	1560 x 0.07	
10	7 x 1.35	80 x 0.40	320 x 0.20	1280 x 0.10	2600 x 0.07	
16	7 x 1.70	128 x 0.40	512 x 0.20	2048 x 0.10		
25	7 x 2.13	200 x 0.40	800 x 0.20	3200 x 0.10		
35	7 x 2.52	280 x 0.40	1120 x 0.20			
50	19 x 1.83	400 x 0.40	705 x 0.30			
70	19 x 2.17	356 x 0.50	990 x 0.30			
95	19 x 2.52	485 x 0.50	1340 x 0.30			
120	37 x 2.03	614 x 0.50	1690 x 0.30			
150	37 x 2.27	765 x 0.50	2123 x 0.30			
185	37 x 2.52	944 x 0.50	1470 x 0.40			
240	61 x 2.24	1225 x 0.50	1905 x 0.40			


Han

Insert	Wire gauge	Stripping length	Tightening torque	Max. cable insulation diameter	Size hexagon recess	ISK dimension for cable indication
	(mm ²)	(mm)	(Nm)	(mm)	(SW)	(mm)
Han® K 4/4 finger proofed	6 – 16	6 mm ² : 11+1 10 mm ² : 11+1 16 mm ² : 11+1	6 mm ² : 2 10 mm ² : 3 16 mm ² : 4	8.9	2.5	7.4 PE +1.5
	10 – 22	10 mm ² : 11+1 16 mm ² : 11+1 22 mm ² : 13+1	10 mm ² : 3 16 mm ² : 4 22 mm ² : 5	8.9 8.9 11	2.5	7.4 7.4 5.4 PE +1.5
Han® K 4/4	6 – 16	6 mm ² : 11+1 10 mm ² : 11+1 16 mm ² : 11+1	6 mm ² : 2 10 mm ² : 3 16 mm ² : 4	8.9	2.5	7.4 PE +1.5
	10 – 22	10 mm ² : 11+1 16 mm ² : 11+1 22 mm ² : 13+1	10 mm ² : 3 16 mm ² : 4 22 mm ² : 5	8.9 8.9 11	2.5	7.4 7.4 5.4 PE +1.5
Han® K 6/12	2.5 – 8	2.5 mm ² : 5+1 4 mm ² : 5+1 6 mm ² : 8+1 8 mm ² : 8+1	2.5 mm ² : 1.5 4 mm ² : 1.5 6 mm ² : 2 8 mm ² : 2	6.1	2	4.7
	6 - 10	6 mm ² : 8+1 8 mm ² : 8+1 10 mm ² : 8+1	6 mm ² : 2 6 mm ² : 2 10 mm ² : 2	6.1	2	4.7
Han® K 6/6	16 – 35	13+/-1	16 mm ² : 6 25 mm ² : 7 35 mm ² : 8	11.4	4	4.9
	10 – 25	13+/-1	10 mm ² : 6 16 mm ² : 6 25 mm ² : 7	11.4	4	4.9
Han® K 8/0	10 – 25	13+/-1	10 mm ² : 6 16 mm ² : 6 25 mm ² : 7	11.4	4	4.75
Han® Q 2/0	4 - 6	8+1	1.8	7.3	2	5.6
Han® Q 2/0 High Voltage	10 optional	PE: 2 mm longer				-
Han® 200 A module	25 – 40	16	25 mm ² : 8 35 mm ² : 8	12 16	5	3 -
Han® 200 A module with PE						
Han® 200 A module	40 – 70	16	50 mm ² : 9 70 mm ² : 10	12 16	5	3 -
Han® 200 A module with PE						
Han® 100 A module	38	13+/-1	8	11.4	4	4.9
	16 – 35	13+/-1	16 mm ² : 6 25 mm ² : 7 35 mm ² : 8	11.4	4	4.9
	10 – 25	13+/-1	10 mm ² : 6 16 mm ² : 6 25 mm ² : 7	11.4	4	4.9
Han® 70 A module	6 - 16	6 mm ² : 11+1 10 mm ² : 11+1 16 mm ² : 11+1	6 mm ² : 2 10 mm ² : 3 16 mm ² : 4	8.9	2.5	7.4
	14 - 22	12.5+1	14 mm ² : 4 16 mm ² : 4 22 mm ² : 5	10	2.5	5.9
Han® 40 A module	2.5 – 8	2.5 mm ² : 5+1 4 mm ² : 5+1 6 mm ² : 8+1 8 mm ² : 11+1	2.5 mm ² : 1.5 4 mm ² : 1.5 6 mm ² : 2 10 mm ² : 2	4 4 6 10.5	2	4.7
	6 – 10	6 mm ² : 8+1 10 mm ² : 11+1	6 mm ² : 2 10 mm ² : 2	6 10.5	2	4.7
Han® C module with axial screw terminal	2.5 – 8	2.5 mm ² : 5+1 4 mm ² : 5+1 6 mm ² : 8+1 10 mm ² : 11+1	2.5 mm ² : 1.5 4 mm ² : 1.5 6 mm ² : 2 10 mm ² : 2	4 4 6 8.2	2	5.2
	6 – 10					
Han® K3/0 straight	35 – 70	22	35 mm ² : 8 50 mm ² : 9 70 mm ² : 10	15	5	8.2

Insert	Wire gauge	Stripping length (mm)	Tightening torque	Max. cable insulation diameter (mm)	Size hexagon recess (SW)	ISK dimension for cable indication (mm)
	(mm ²)		(Nm)			
Han® K3/0 angled	35 – 70	22	35 mm ² : 8 50 mm ² : 9 70 mm ² : 10	15	5	9.0
Han® K3/2 straight	35 – 70	22	35 mm ² : 8 50 mm ² : 9 70 mm ² : 10	Power: 15 PE: 10	5	Power: 8.2 PE: 7.2
Han® K3/2 angled	35 – 70	22	35 mm ² : 8 50 mm ² : 9 70 mm ² : 10	Power: 15 PE: 10	5	9.0
Han® HC Modular 350	35 – 70	19 + 1	35 mm ² : 8 50 mm ² : 10 70 mm ² : 12	19.5	5	13
	95 – 120	19 + 1	95 mm ² : 14 120 mm ² : 16	19.5	5	13
Ground contact for Han® HC Modular	35 – 70	19 + 1	35 mm ² : 8 50 mm ² : 10 70 mm ² : 12	-	5	-
Han® HC Modular 650	70 – 120	23 + 2	70 mm ² : 12 95 mm ² : 14 120 mm ² : 16	26.5	8	28
	150 – 185	23 + 2	150 mm ² : 17 185 mm ² : 18	26.5	8	28

Overview inserts with axial screw terminal



Cage-clamp terminal

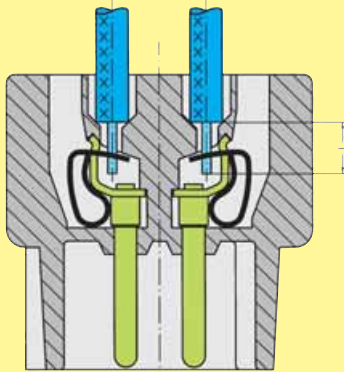

This termination method requires very little preparation of the wire and no special tools, leading to a low installed cost and a high degree of mechanical security.

- For all stranded and solid wires with a cross section 0.14 to 2.5 mm².
- Ease of termination. Conductor and screwdriver are in same plane.
- No special preparation of stripped conductor.
- The larger the conductor the higher the clamping force.
- The termination is vibration-proof.
- Guaranteed constant low resistance connection of the cage-clamp terminal.
- The cage-clamp system is internationally approved. VDE, SEV, CSA, UL, ÖVE, SEMKO, LCIE (France), Germanischer Lloyd, DET Norske Veritas


One conductor per termination Slot for screwdriver

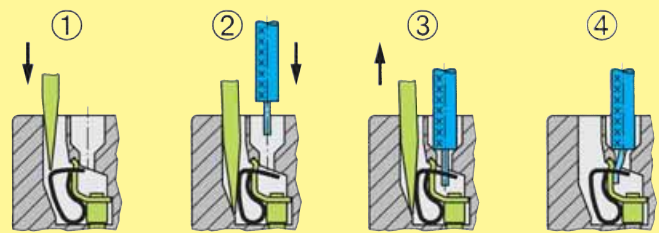

Screwdriver width: 3.0 x 0.5 mm




Inserts	max. wire gauge		Stripping length l (mm)
	(mm ²)	AWG	
Han® ES, Han® Hv ES	0.14 - 2.5	26 - 14	7 - 9
Han® ESS	0.14 - 2.5	26 - 14	9 - 11
Han® K 4/4	0.14 - 2.5	26 - 14	7 - 9
Han® ES Modul	0.14 - 2.5	26 - 14	

IDC (Insulation displacement terminal)

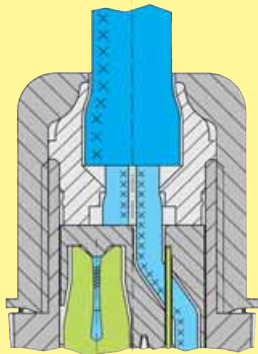

Inserts	max. wire gauge	
	(mm ²)	AWG
M8-S/M12-S	0.14 - 0.34	26 - 22
Circular connectors M12 angled	0.25 - 0.50	24 (7/32) - 22
Circular connectors M12-L	0.34 - 0.75	22 - 18
M12-L PROFIBUS	0.25 - 0.34	24 - 22
M12-L Ethernet	0.25 - 0.34	24 - 22
	0.34 - 0.5	22 - 18
Panel feed through Pg 13,5 /M20	0.75 - 1.50	18 - 16
Panel feed through Pg 9	0.25 - 0.50	24 (7/32) - 22
HARAX® 3 A	0.75 - 1.5	18 - 16

Han®-Quick Lock termination technique

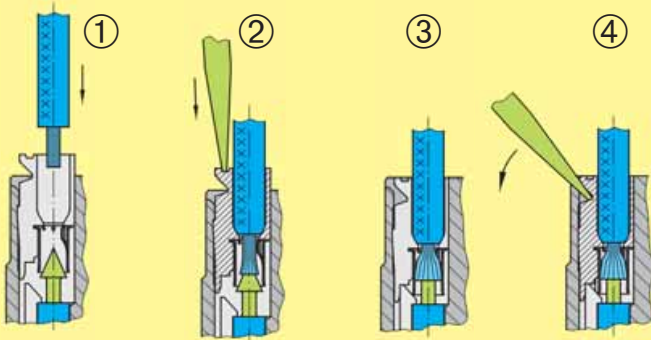

This new termination technique from HARTING combines the reliability and the simple operation of the cage clamp termination with the low space requirements of crimp technology.

Han-Quick Lock® is ideally suited to high contact densities and is considerably superior over other termination techniques. No other technology is so simple, space saving and fast. For this vibration safe termination, no special tools are necessary.

- Fast, simple and robust termination technique
- Field assembly without a special tool
- Compatible also to inserts with other termination technologies
- Combines high contact density similar to crimp termination with the simple connection like a cage clamp terminal


Insert connectors:

- Han® 4A
- Han® Q5/0
- Han® PushPull Power 4/0
- Han® Q12/0
- Han® EE modules

Technical characteristics:

Material	Isolation body - polycarbonate Active termination element - polycarbonate Quick-Lock spring - stainless steel Contact - copper alloy
Terminal cross-section	0.5 - 2.5 mm ² (AWG 20 - 14)
Stripping length	10 mm
Insulating resistance	> 10 ¹⁰ Ohm
Flammability according to	UL 94 V 0
Mechanical working life	≥ 500 mating cycles
Screwdriver	0.4 x 2.5 mm or 0.5 x 3.0 mm

Han

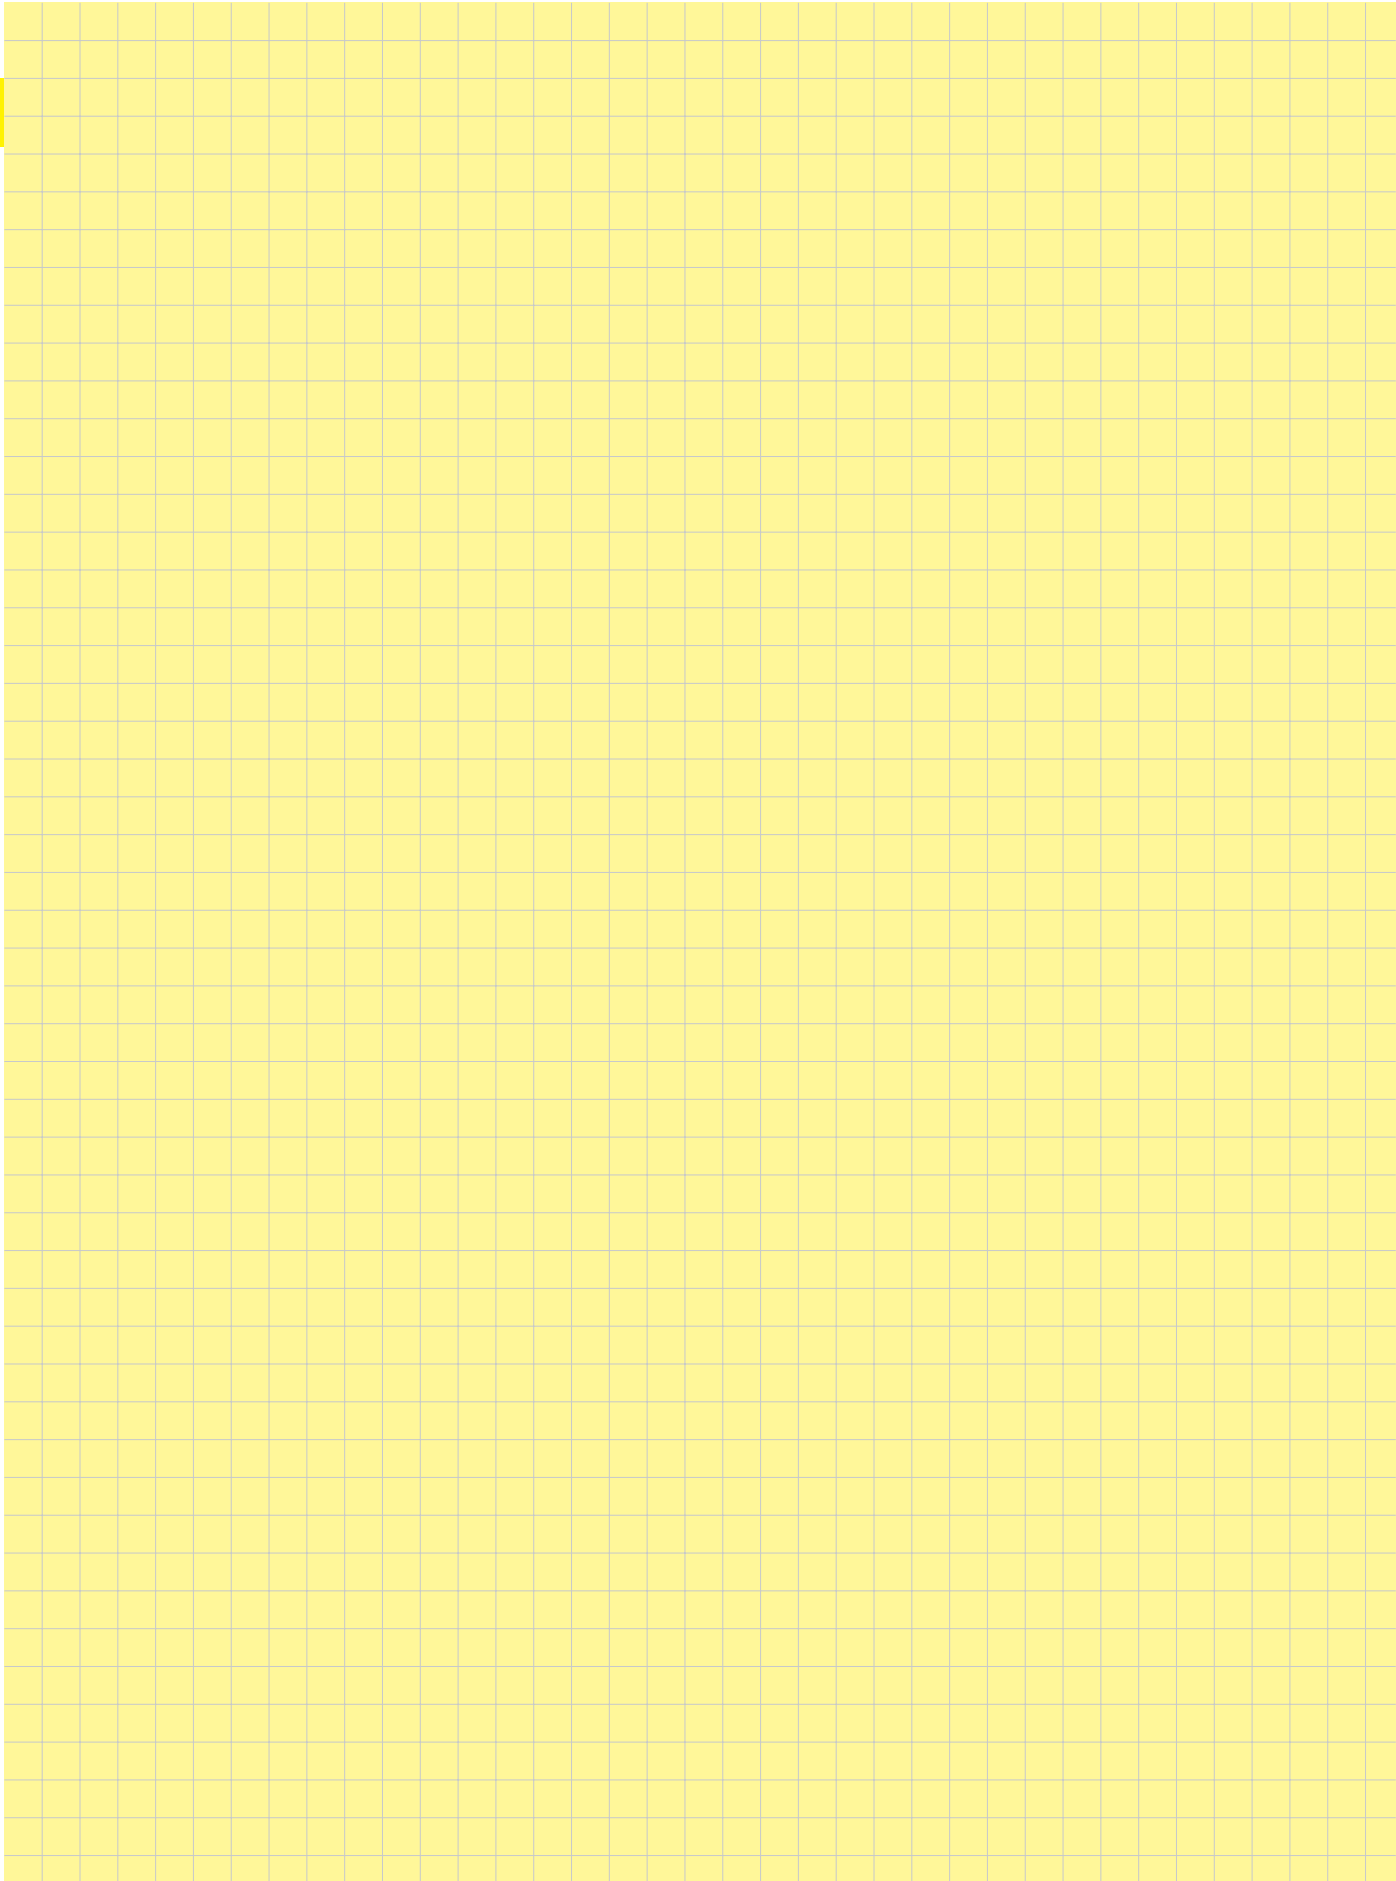

General

The choice of connectors entails more than just considering factors such as functionality, the number of contacts, current and voltage ratings. It is equally important to take account of where the connectors are to be used and the prevailing ambient conditions. This in turn means that, dependent on the conditions under which they are to be installed and pursuant to the relevant standards, different voltage and current ratings may apply for the same connectors.

The most important influencing factors and the corresponding electrical characteristics of the associated connectors are illustrated here in greater detail.

Overvoltage category

The overvoltage category is dependent on the mains voltage and the location at which the equipment is installed. It describes the maximum overvoltage resistance of a device in the event of a power supply system fault, e. g. in the event of a lightning strike.

The overvoltage category affects the dimensioning of components in that it determines the clearance air gap. Pursuant to the relevant standards, there are 4 overvoltage categories.

Equipment for industrial use, such as full HARTING heavy duty Han connector, fall into Overvoltage Category III.

Extract from DIN VDE 0110-1 and IEC 60664-1, Para. 2.2.2.1.1

Equipment of **overvoltage category IV** is for use at the origin of the installation.

Note 1: Examples of such equipment are electricity meters and primary overcurrent protection equipment.

Equipment of **overvoltage category III** is equipment in fixed installations and for cases where the reliability and the availability of the equipment is subject to special requirements.

Note 2: Examples of such equipment are switches in the fixed installation and equipment for industrial use with permanent connection to the fixed installation.

Equipment of **overvoltage category II** is energy-consuming equipment to be supplied from the fixed installation.

Note 3: Examples of such equipment are appliances, portable tools and other household equipment with similar loads.

If such equipment is subjected to special requirements with regard to reliability and availability, overvoltage category III applies.

Equipment of **overvoltage category I** is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriately low level.

Note: Examples are protected electronic circuits.

Rated impulse voltages (Table 5 of DIN EN 61984)

Nominal voltage of the supply system (= rated insulation voltage of equipment)					Preferred values for the rated impulse voltage kV (1.2/50 μs)			
					Overvoltage category			
Voltage line to earth derived from the nominal voltage of the supply system to the a. c. voltage (r. m. s. value) or d. c. voltage	AC voltage (r. m. s. value)	AC voltage (r. m. s. value)	AC voltage (r. m. s. value, d. c. voltage)	AC voltage (r. m. s. value, d. c. voltage)	I	II	III	IV
					Special protected levels	Level for electrical equipment (household and others)	Level for distribution supply systems	Input level
V	V	V	V	V				
100	66/115	66	60	–	0.5	0.8	1.5	2.5
150	120/208; 127/220	115; 120; 127	110; 120	220-110; 240-120	0.8	1.5	2.5	4
300	220/380; 230/400; 240/415; 260/440; 277/480	220; 230; 240; 260; 277	220	440-220	1.5	2.5	4	6
600	347/600; 380/660; 400/690; 415/720; 480/830	347; 380; 400; 415; 440; 480; 500; 577; 600	480	960-480	2.5	4	6	8
1000		660; 690; 720; 830; 1000	1000	–	4	6	8	12

Pollution degree

The dimensioning of operating equipment is dependent on environmental conditions. Any pollution or contamination may give rise to conductivity that, in combination with moisture, may affect the insulating properties of the surface on which it is deposited. The pollution degree influences the design of components in terms of the creepage distance.

The pollution degree is defined for exposed, unprotected insulation on the basis of environmental conditions.

HARTING heavy duty Han connectors are designed as standard for Pollution Degree 3.

Pollution degree 1

in air-conditioned or clean, dry rooms, such as computer and measuring instrument rooms, for example.

Pollution degree 2

in residential, sales and other business premises, precision engineering workshops, laboratories, testing bays, rooms used for medical purposes. As a result of occasional moisture condensation, it is to be anticipated that pollution/contamination may be temporarily conductive.

Pollution degree 3 in industrial, commercial and agricultural premises, unheated storage premises, workshops or boiler rooms, also for the electrical components of assembly or mounting equipment and machine tools.

Pollution degree 4

in outdoor or exterior areas such as equipment mounted on the roofs of locomotives or tramcars.

Extract from DIN EN 60664-1 (VDE 0110-1), Para. 4.6.2

Pollution degree 1: No pollution or only dry, non-conductive pollution occurs. The pollution has no influence.

Pollution degree 2: Only non-conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected.

Pollution degree 3: Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.

Pollution degree 4: The pollution generates persistent conductivity caused by conductive dust or by rain or snow.

Special ruling for connectors

Subject to compliance with certain preconditions, the standard for connectors permits a lower pollution degree than that which applies to the installation as a whole. This means that in a pollution degree 3 environment, connectors may be used which are electrically rated for pollution degree 2. The basis for this is contained in DIN EN 61984, Para. 6.19.2.2.

Extract from DIN EN 61984, Para. 6.19.2.2

For a connector with a degree of protection IP 54 or higher according to IEC 60529 the insulating parts (clearance and creepage) inside the enclosure may be dimensioned for a lower pollution degree.

This also applies to mated connectors where enclosure is ensured by the connector housing and which may only be disengaged for test and maintenance purposes.

The conditions fulfill,

- a connector which is protected to at least IP 54 as per IEC 60529,
- a connector which is installed in a housing and which as described in the standard is disconnected for testing and maintenance purposes only,
- a connector which is installed in a housing and which when disconnected is protected by a cap or cover to at least IP 54,
- a connector located inside a switching cabinet to at least IP 54.

These conditions do not extend to connectors which when disconnected remain exposed to the industrial atmosphere for an indefinite period.

It should be noted that pollution can affect a connector from the inside of an installation outwards.


Typical applications in which to choose pollution degree 2 connectors:

- A connector serving a drive motor which is disconnected only for the purpose of replacing a defective motor, even when the plant or system otherwise calls for pollution degree 3.
- Connectors serving a machine of modular design which are disconnected for transport purposes only and enable rapid erection and reliable commissioning. In transit, protective covers or adequate packing must be provided to ensure that the connectors are not affected by pollution/contamination.
- Connectors located inside a switching cabinet to IP 54. In such cases, it is even possible to dispense with the IP 54 housings of the connectors themselves.


Specifying electrical data

Electrical data for connectors are specified as per DIN EN 61984.

This example identifies a connector suitable for use in an unearthed power system or earthed delta circuit (see page 00.21, Table 5 of DIN EN 61984):

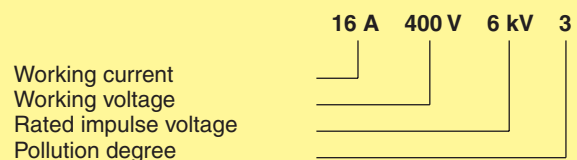

This example identifies a connector suitable exclusively for use in earthed power systems (see page 00.21, Table 5 of DIN EN 61984):

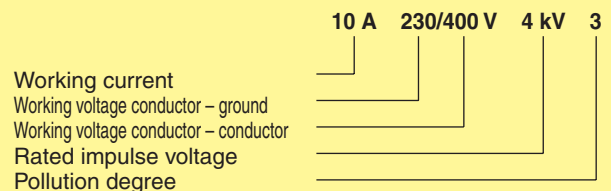


Other terms explained

Clearance air gap

The shortest distance through the air between two conductive elements (see DIN EN 60664-1 (VDE 0110-1), Para. 3.2). The air gaps are determined by the surge voltage withstand level.

Creepage distance

Shortest distance on the surface of an solid insulating material between two conductive elements (see DIN EN 60664-1 (VDE 0110-1), Para. 3.3). The creepage distances are dependent on the rated voltage, the pollution degree and the characteristics of the insulating material.

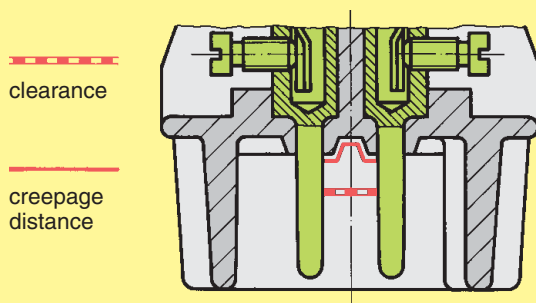


Working voltage

Fixed voltage value on which operating and performance data are based. More than one value for rated voltage or rated voltage range may be specified for the same connector.

Rated impulse voltage

The rated impulse voltage is determined on the basis of the overvoltage category and the nominal power supply voltage. This level in turn directly determines the test voltage for testing the overvoltage resistance of the connector (*Waveform voltage in 1.2/50 μ s as per IEC 60060-1*).

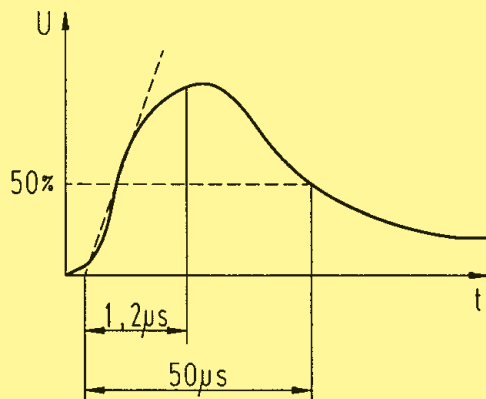

Working current

Fixed current, preferably at an ambient temperature of 40 °C, which the connector can carry on a permanent basis (without interruption), passing simultaneously through all contacts which are in turn connected to the largest possible conductors, without exceeding the upper temperature limit.

The dependence of the rated current on ambient temperature is illustrated in the respective derating diagrams.

Transient overvoltages

Short-term overvoltage lasting a few milliseconds or less, oscillatory or non-oscillatory, generally heavily damped (see DIN EN 60664-1 (VDE 0110-1, Para. 3.7.2). An overvoltage may occur as a result of switching activities, a defect or lightning surge, or may be intentionally created as a necessary function of the equipment or component.

Power-frequency withstand voltage

A power-frequency overvoltage (50/60 Hz). Applied for a duration of one minute when testing dielectric strength. For test voltages in association with surge voltage withstand levels, see extract from Table 8, DIN EN 61984.

Test voltages (Extract from Table 8, DIN EN 61984)

Impulse withstand voltage kV (1.2/50 μ s) at an altitude of 2000 m	RMS withstand voltage kV (50/60 Hz)
0.5	0.37
0.8	0.50
1.5	0.84
2.5	1.39
4	2.21
6	3.31
8	4.26
12	6.6

CTI (Comparative Tracking Index)

This figure gives an indication of the conductivity of insulating materials and affects the specified creepage distances. The influence of the CTI value on the creepage distance is as follows: the higher the index value, the shorter the creepage distance. The CTI is used to divide plastics into insulation groups.

Breakdown of insulation groups:

- I 600 \leq CTI
- II 400 \leq CTI < 600
- IIIa 175 \leq CTI < 400
- IIIb 100 \leq CTI < 175

Protection levels as per IEC 60529

The protection level describes the leak-proof character of housing, e. g. for electrical equipment. It ranges from IP 00 to IP 68. HARTING heavy duty Han connectors feature a standard protection level of IP 65 (see page 00.09, Table based on DIN EN 60529, IEC 60529).

Derating diagram as per DIN EN 60512-5

These diagrams are used to illustrate the maximum current carrying capacity of components. The illustration follows a curve which shows the current in relation to ambient temperature. Current carrying capacity is limited by the thermal characteristics of contacts and insulating elements which have an upper temperature limit which should not be exceeded.

Current carrying capacity

The current carrying capacity is determined in tests which are conducted on the basis of the DIN EN 60 512-1 and -2. The current carrying capacity is limited by the thermal properties of materials which are used for inserts as well as by the insulating materials. These components have a limiting temperature which should not be exceeded.


The relationship between the current, the temperature rise (loss at the contact resistance) and the ambient temperature of the connector is represented by a curve. On a linear co-ordinate system the current lies on the vertical line (ordinate) and the ambient temperature on the horizontal line (abscissa) which ends at the upper limiting temperature.

In another measurement the self-heating (Δt) at different currents is determined.

At least 3 points are determined which are connected to a parabolic curve, the basic curve.

The corrected current carrying capacity curve is derived from this basic curve. The reasons for the correction are external factors that bring an additional limitation to the current carrying capacity, i.e. connectable wire gauge or an unequal dispersion of current.

Definition: The rated current is the continuous, not interrupted current a connector can take when simultaneous power on all contacts is given, without exceeding the maximum temperature.

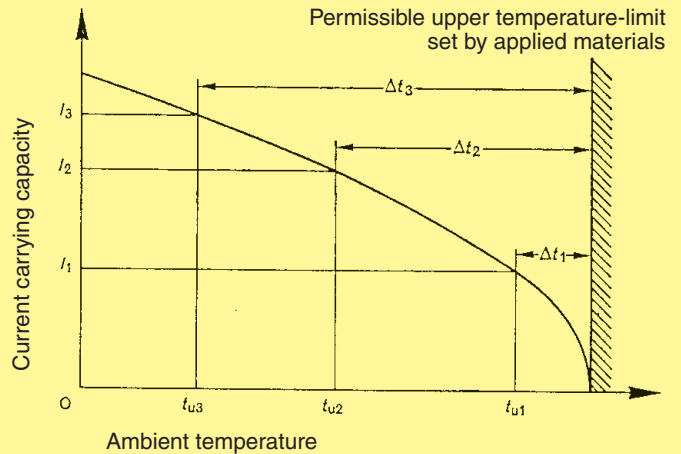


Example of a current carrying curve

Acc. to DIN EN 61 984 the sum of ambient temperature and the temperature rise of a connector shall not exceed the upper limiting temperature. The limiting temperature is valid for a complete connector, that means insert plus housing.

As a result the insert gives the limit for the temperature of a complete connector and thus housings as well.

In practice it is not usual to load all terminals simultaneously with the maximum current. In such a case one contact can be loaded with a higher current as permitted by the current capacity curve, if less than 20 % of the whole is loaded.

However, for these cases there are no universal rules. The limits have to be determined individually from case to case. It is recommended to proceed in accordance with the relevant rules of the DIN EN 60 512-5-1 and -2.

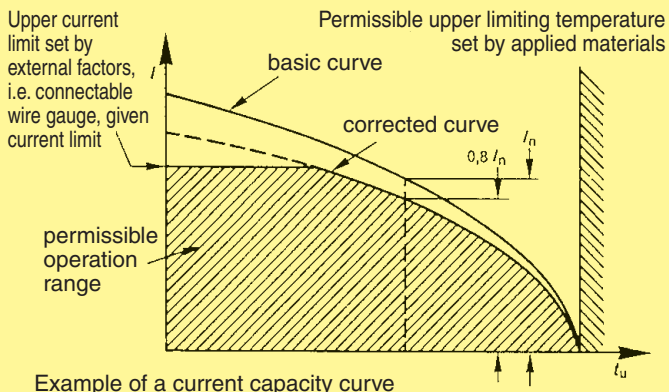

Example of a current capacity curve

Current carrying capacity of copper wires


Diameter [mm ²] of single wires in a three-phase system	0.75	1	1.5	2.5	4	6	10	16	25	35
Type of installation										
B1 Conductors/single core cables in conduit and cable trunking systems	8.6	10.3	13.5	18.3	24	31	44	59	77	96
B2 Cables in conduit and cable trunking systems	8.5	10.1	13.1	17.4	23	30	40	54	70	86
C Cables on walls	9.8	11.7	15.2	21	28	36	50	66	84	104
E Cables on open cable trays	10.4	12.4	16.1	22	30	37	52	70	88	110

Depiction in accordance with DIN EN 60 204-1 for PVC-insulated copper wires in an ambient temperature of + 40 °C under permanent operating conditions.

For different conditions and temperatures, installations, insulation materials or conductors the relevant corrections have to be carried out.

Transient current carrying capacity

A transient current in circuits can be generated by switching operations such as the starting of a motor or a short circuit in a faulty installation. This can cause thermal stress at the contact. These short and very high increases cannot be dissipated quickly and therefore a local heating effect at the contact is the result. Contact design is an important feature when transient currents are encountered. HARTING contacts are machined from solid material and are therefore relatively unaffected by short overloads when compared to stamped and formed designs. For guidance please see the table below.

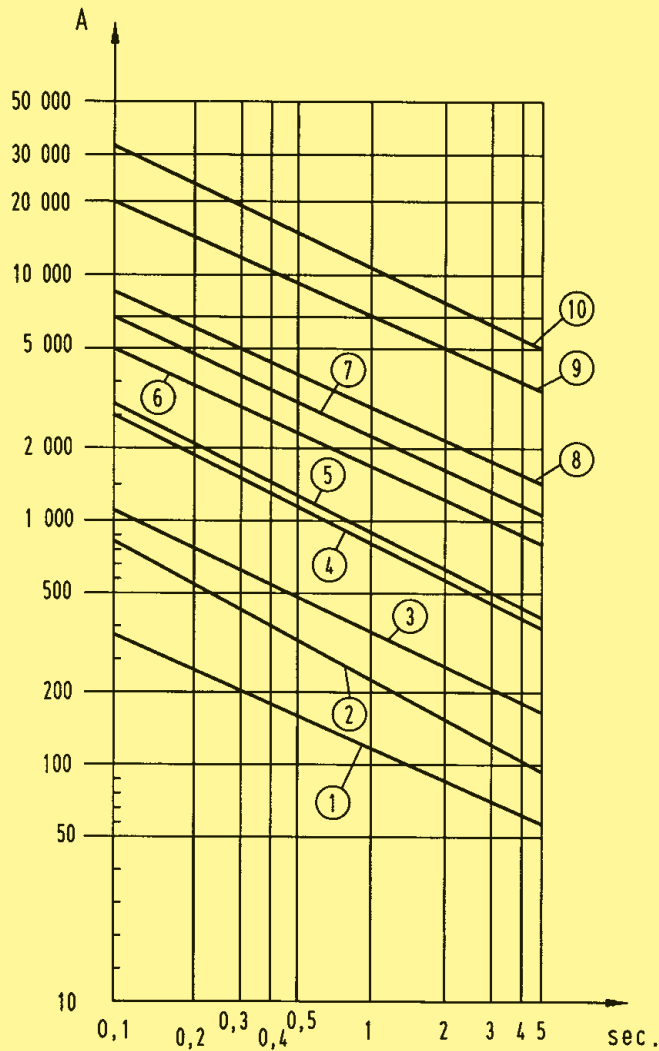


- | | |
|---------------------------------------|-----------------------|
| ① Han D® | $I_N = 10 \text{ A}$ |
| ② Han® 3 A / 4 A | $I_N = 10 \text{ A}$ |
| ③ Han A® / Han E®, Han® ES, EE, Q 5/0 | $I_N = 16 \text{ A}$ |
| ④ Han® 6 HsB | $I_N = 35 \text{ A}$ |
| ⑤ Han® C/K axial | $I_N = 40 \text{ A}$ |
| ⑥ Han® K 4/8 | $I_N = 80 \text{ A}$ |
| ⑦ Han® K 6/6 | $I_N = 100 \text{ A}$ |
| ⑧ Han® K 3/0 | $I_N = 200 \text{ A}$ |
| ⑨ Han® HC-Modular 350 | $I_N = 350 \text{ A}$ |
| ⑩ Han® HC-Modular 650 | $I_N = 650 \text{ A}$ |

Short circuit carrying capacity

Low currents and voltages

HARTING's standard contacts have a silver plated surface. This precious metal has excellent conductive properties. In the course of a contact's lifetime, the silver surface generates a black oxide layer due to its affinity to sulphur. This layer is smooth and very thin and is partly interrupted when the contacts are mated and unmated, thus guaranteeing very low contact resistances. In the case of very low currents or voltages small changes to the transmitted signal may be encountered. This is illustrated below where an artificially aged contact representing a twenty year life is compared with a new contact.


In systems where such a change to the transmitted signal could lead to faulty functions and also in extremely aggressive environments, HARTING recommend the use of gold plated contacts.

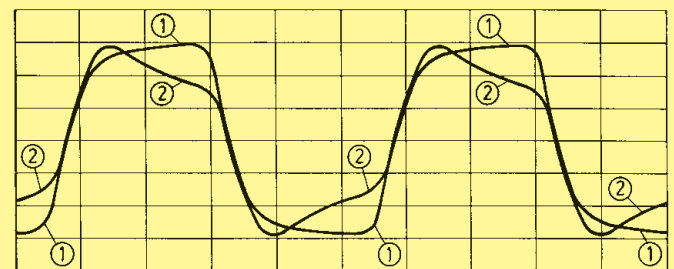

Changes to the transmitted signal after artificial ageing

- ① new contact
- ② after ageing

Below is a table derived from actual experiences.

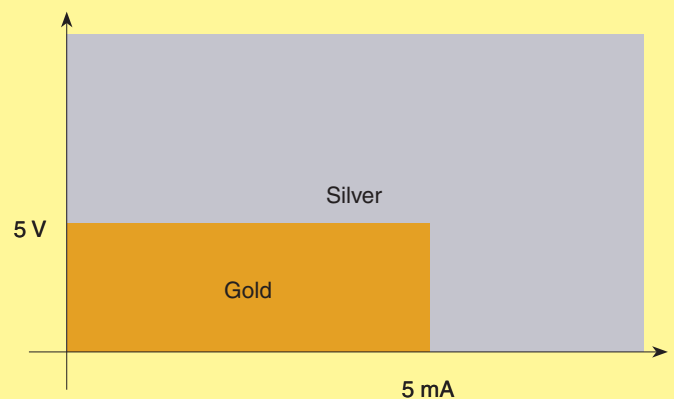

Recommendation

The reason for the new product offerings is the publication of the international DIN EN 50262 metric thread specification. The existing Pg series, Pg 7 to Pg 48 will be, in time, replaced by the metric series M 12 to M 63.

The adoption of metric threads considerably simplifies the understanding and specification of glands as the product type description contains the thread dimension. E.g. M 20 refers to 20 mm thread diameter.


To differentiate the metric threaded hoods and housings from the previous Pg versions metric types will be marked with **(M)**.

The Cross Reference table shows the correlation between the Pg versions and the new metric types.

Please notice that the maximum cable diameter will be reduced by the new metric cable glands.


Pg	Metric
Pg 11	M 20
Pg 13.5	M 25
Pg 16	M 32
Pg 21	M 40
Pg 29	M 50
Pg 36	M 50
Pg 42	M 50

Below is shown the cable range of metric glands:

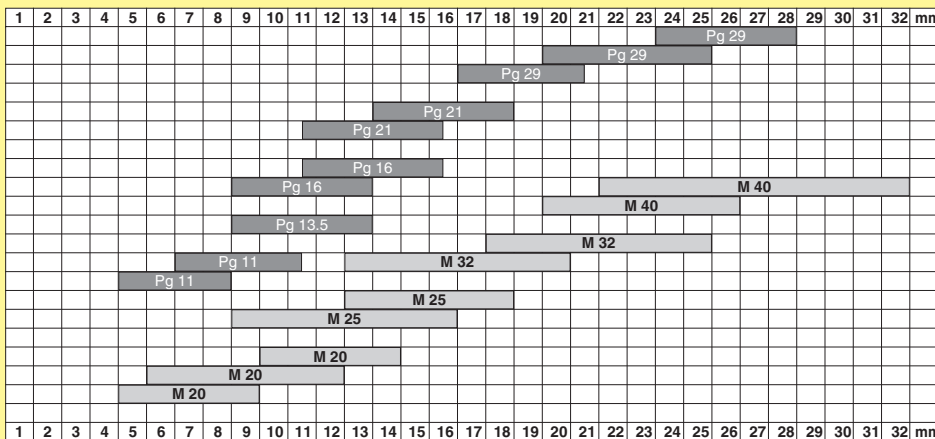

Cable

The diagram shows different cable-diameters, being dependent on wire gauges and number of conductors. All data are averages for commercial cables.

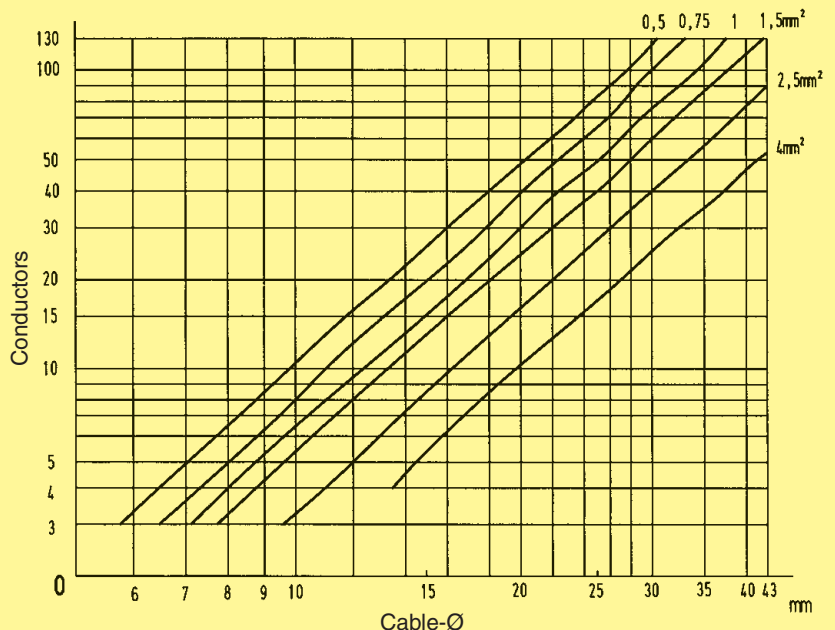

<p><i>This Declaration of Conformity is suitable to the European Standard EN 45 014, „General criteria for suppliers declaration of conformity“.</i></p> <p><i>The basis for the criteria has been found in international documentation, particularly in ISO/IEC Guide 22, 1996, „Information on manufacturers declaration of conformity with standards or other technical specifications“.</i></p>	<p>We</p> <p>HARTING KGaA Marienwerderstr. 3 32339 Espelkamp</p> <p>HARTING Electric GmbH & Co. KG Wilhelm-Harting-Str. 1 32339 Espelkamp</p> <p>declare under our own responsibility that the product series of</p> <p style="text-align: center;">Heavy Duty Han[®] Connectors</p> <p>is in conformity with the following standard(s) or other normative documents:</p> <p style="text-align: center;">Connectors - safety requirements and tests IEC 61 984</p> <p>This declaration of conformity refers to the Han[®]-series</p> <table border="0" style="width: 100%;"> <tr> <td>Han A[®]</td> <td>Han E[®]</td> <td>Han[®] M</td> </tr> <tr> <td>Han-Brid[®]</td> <td>Han E[®] AV</td> <td>Han-Modular[®]</td> </tr> <tr> <td>Han-Com[®]</td> <td>Han[®] EE</td> <td>Han[®] Q</td> </tr> <tr> <td>Han D[®]</td> <td>Han[®] ES</td> <td>Han[®] HPR</td> </tr> <tr> <td>Han D[®] AV</td> <td>Han[®] ESS</td> <td>Han[®] B</td> </tr> <tr> <td>Han DD[®]</td> <td>Han[®] HsB</td> <td>Han[®] HC Modular 350</td> </tr> </table>	Han A [®]	Han E [®]	Han [®] M	Han-Brid [®]	Han E [®] AV	Han-Modular [®]	Han-Com [®]	Han [®] EE	Han [®] Q	Han D [®]	Han [®] ES	Han [®] HPR	Han D [®] AV	Han [®] ESS	Han [®] B	Han DD [®]	Han [®] HsB	Han [®] HC Modular 350
Han A [®]	Han E [®]	Han [®] M																	
Han-Brid [®]	Han E [®] AV	Han-Modular [®]																	
Han-Com [®]	Han [®] EE	Han [®] Q																	
Han D [®]	Han [®] ES	Han [®] HPR																	
Han D [®] AV	Han [®] ESS	Han [®] B																	
Han DD [®]	Han [®] HsB	Han [®] HC Modular 350																	
	<p>Our testing laboratory is accredited and monitored by the German Accreditation Body Technology/ (DATech). Reg.-Nr. DAT-P-041/94</p>																		
	<p>Our quality system is certified and monitored by DQS in conformity with the standard DIN EN ISO 9001. Cert.-Nr. 2204-02</p>																		
<p><u>Espekamp, 2007-12-07</u> Place and Date of publication</p>	<p>Dr. Georg Staperfeld Director of Corporate Technology-Services, HARTING KGaA</p>																		
<p><u>Espekamp, 2007-12-07</u> Place and Date of publication</p>	<p>Dipl.-Ing. Hartmut Schweltmann Director of Marketing and Engineering, HARTING Electric GmbH & Co. KG</p>																		

Han

